

Superior Mesh Tape for Long-Lasting Repairs



ALL-PURPOSE DRYWALL MESH TAPE

TABLE OF CONTENT

PAGE NO.

| | |
|---|---|
| All-purpose drywall Mesh tape | 3 |
| Features & Benefits | 3 |
| Product Application | 4 |
| Product Technical Specifications 60 GSM Technical Specifications | 6 |
| Packaging Specifications | 7 |
| Important Guidelines | 8 |



HEAVY-DUTY

STRONG HOLD

IN EVERY ASPECT.


ABOUT US

Marvel Life Mesh Tape offers superior flexibility and self-adhesive properties, crafted from high-quality fibreglass threads or a blend of fibreglass and paper. Its water-based acrylic adhesive backing ensures effortless application and dependable adhesion. The cross-fiberglass construction delivers enhanced joint strength, making it perfect for repairing drywall and plaster holes and cracks. The tacky backing simplifies installation, adhering independently to walls and enhancing bond strength at flat or corner joints, seams, and wallboard corners, ultimately preventing cracks as the drywall dries.

PRODUCT FEATURES



High Tensile Strength



Roughened Surface



Center-Crease Design



Prevents Blisters and Bubbles



Mold and Moisture Resistant

DRYWALL MESH TAPE

APPLICATIONS



STREAMLINED APPLICATION PROCESS

Eliminates the need for an embedding coat, making the application process more efficient.

REINFORCES JOINT BONDS

Enhances compound penetration, effectively strengthening joint bonds.



LONG-LASTING PERFORMANCE

Resists tearing, stretching, and surface distortion, guaranteeing durability.

SUPERIOR BONDING STRENGTH

Utilizes a roughened surface for exceptional bonding strength.




DRYWALL MESH TAPE APPLICATIONS



EFFICIENT FINISHING

Enables same-day joint finishing with a setting compound, maximizing efficiency.



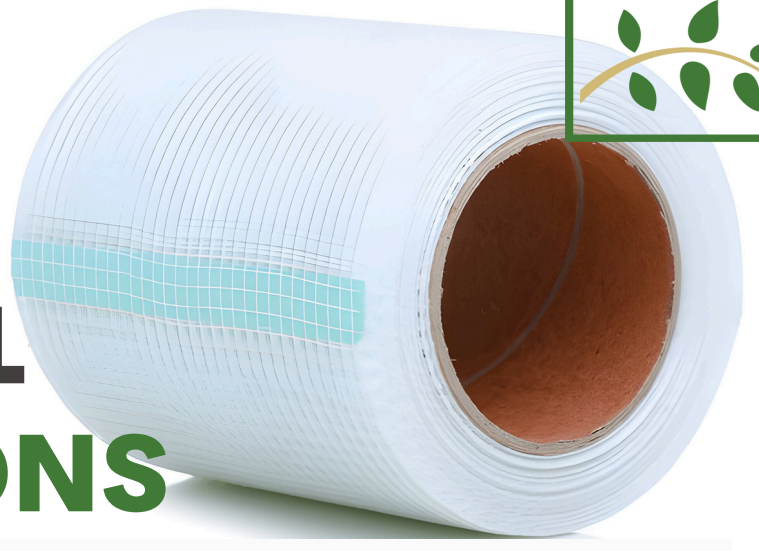


TECHNICAL SPECIFICATIONS

60 GSM Technical Specifications

| Characteristic | Unit | Value |
|--------------------------|--------|-----------------|
| • Color | ----- | White |
| • Backing | ----- | Fiberglass Mesh |
| • Adhesive Type | ----- | Water Based |
| • Thickness | GSM | 60 ± 0.05 |
| • Tensile Strength | N/25MM | ≥ 250 |
| • Peel Adhesion | N/25MM | ≥ 0.08 |
| • Elongation | % | ≥ 3 |
| • Temperature Resistance | °C | 0-80 |

| Characteristic | Unit | WARP | WEFT |
|--------------------|-----------|-------|-------|
| • YARN | YARN/10CM | 32*2 | 32*2 |
| • TEX | ----- | 32*2 | 66 |
| • TENSILE STRENGTH | N/25MM | ≥ 500 | ≥ 500 |

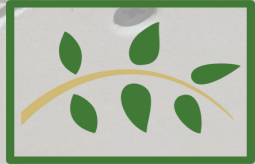

PACKAGING SPECIFICATIONS

| Products Per Box | Width | Length | Colour |
|------------------|-------|--------|--------|
| 30 | 48 mm | 90 m | White |
| 20 | 96 mm | 90 m | White |

***Customizations are available based on your requirements. A minimum order quantity of 250 boxes is required, with a delivery time of at least 2 months after order confirmation.**



IMPORTANT GUIDELINES



OPTIMAL APPLICATION TEMPERATURE

Ideal tape application temperature is 8 to 38 Celsius. It is not suggested to use the tape below zero Celsius, because the adhesive will become too firm to adhere readily. However, once customers insist on using the tape under such a low temperature, please contact us, Marvel Life Solutions will adjust the adhesive, but Marvel Life Solutions doesn't guarantee anything.



APPLICATION TECHNIQUE

Firm application pressure helps develop better adhesive contact and improves bond strength, the bonding surfaces must be clean, dry and well unified. Seal completely when not use the tape, avoid expose the tape in the sunlight.



EXPIRY GUIDELINES

Expiry date: Original packaging, 23 C & 60% humidity, 12 months after production date. If product is not kept under such temperature and humidity, jumbo/log rolls should be finished within four months, finished rolls should be finished within one month.