

Fit for Every Custom Need



ALL-PURPOSE DUCT TAPE

TABLE OF CONTENT

PAGE NO.

About All Purpose Duct tape **3**

Features & Benefits **3**

Product Application **4**

Product Technical Specifications **6**

130 Micron Technical Specifications

160 Micron Technical Specifications

200 Micron Technical Specifications

Packaging Specifications **9**

Important Guidelines **10**



**HEAVY-
DUTY**

**STRONG
HOLD**

**IN EVERY
ASPECT.**

ABOUT US

All-Purpose Duct Tape is a versatile and indispensable tool engineered for a myriad of applications, from general repairs to bundling, patching, and mending. This high-quality duct tape boasts exceptional adhesive properties, derived from a specially formulated rubber compound (C₄H₆O₂)_n, which ensures a robust, long-term bond through a thicker adhesive coating. Its polyethylene backing (C₂H₄)_n not only renders the tape waterproof but also enhances its flexibility, allowing it to adhere effectively to irregular surfaces. This is manufactured with precision from premium materials and considering the customers' values, this duct tape guarantees long-lasting adhesion and performance, making it the go-to choice for both domestic and construction settings, even in the most demanding environments and challenging conditions. Renowned for its strength and durability, it remains a staple in various industries, ensuring reliable solutions for a wide range of tasks.

PRODUCT FEATURES



**Excellent
conformability**



**Perfectly
waterproof**



**Suitable for
multiple surfaces**

DUCT TAPE APPLICATIONS




EXTERIOR USE AND PROFESSIONAL REPAIRS

Perfect for outdoor tasks and professional repairs, offering durability in demanding conditions.

SEALING FIBERGLASS INSULATION

Effectively covers and seals thermal insulation, enhancing energy efficiency.

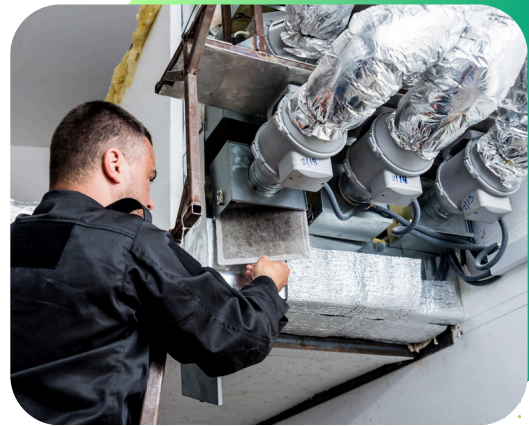

INDUSTRIAL APPLICATIONS

Versatile enough for a wide range of sealing and general-purpose tasks in industrial settings.




AIR CONDITIONING DUCT WORK

Commonly utilized in HVAC systems for securing duct connections and enhancing airflow efficiency.



DUCT TAPE APPLICATIONS

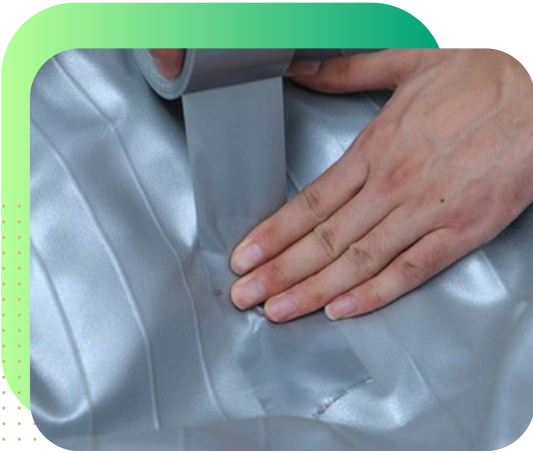

GENERAL SEALING AND REPAIRS

Ideal for patching holes, packing boxes, and executing various repair tasks with ease and reliability.

WATERPROOF COVERING

Provides a reliable waterproof layer over pipe insulation, protecting against moisture and damage.





TECHNICAL SPECIFICATIONS

130 Micron Technical Specifications

| Characteristic | Unit | Value |
|-----------------------------|--------|--------------|
| • Color | ----- | All Colors |
| • Backing | ----- | Cotton Cloth |
| • Adhesive Type | ----- | Holmet Based |
| • Thickness | Micron | 130 ± 0.05 |
| • Initial Tack (Steel Ball) | Number | 20 |
| • Tensile Strength | N/25MM | ≥ 60 |
| • Holding Power | Hours | ≥ 12 |
| • Peel Adhesion | N/25MM | ≥ 12 |
| • Elongation | % | ≥ 60 |
| • Temperature Resistance | °C | 0-80 |



TECHNICAL SPECIFICATIONS

160 Micron Technical Specifications

| Characteristic | Unit | Value |
|-----------------------------|--------|--------------|
| • Color | ----- | All Colors |
| • Backing | ----- | Cotton Cloth |
| • Adhesive Type | ----- | Holmet Based |
| • Thickness | Micron | 160 ± 0.05 |
| • Initial Tack (Steel Ball) | Number | 20 |
| • Tensile Strength | N/25MM | ≥ 60 |
| • Holding Power | Hours | ≥ 24 |
| • Peel Adhesion | N/25MM | ≥ 14 |
| • Elongation | % | ≥ 110 |
| • Temperature Resistance | °C | 0-80 |




TECHNICAL SPECIFICATIONS

200 Micron Technical Specifications

| Characteristic | Unit | Value |
|-----------------------------|--------|--------------|
| • Color | ----- | All Colors |
| • Backing | ----- | Cotton Cloth |
| • Adhesive Type | ----- | Holmet Based |
| • Thickness | Micron | 200 ± 0.05 |
| • Initial Tack (Steel Ball) | Number | 20 |
| • Tensile Strength | N/25MM | ≥ 60 |
| • Holding Power | Hours | ≥ 36 |
| • Peel Adhesion | N/25MM | ≥ 18 |
| • Elongation | % | ≥ 110 |
| • Temperature Resistance | °C | 0-80 |

*Information in the above sheet is the average value of the tests, it should not be taken as the exact values of every single product. Customers have the obligation to check whether the product is suitable for their own applications.



PACKAGING SPECIFICATIONS

| Products Per Box | Width | Length | Colour |
|------------------|-------|--------|-------------|
| 24 | 42 mm | 50 m | Black, Grey |
| 48 | 42 mm | 50 m | Black, Grey |

***Customizations are available based on your requirements. A minimum order quantity of 250 boxes is required, with a delivery time of at least 3 months after order confirmation.**



IMPORTANT GUIDELINES



OPTIMAL APPLICATION TEMPERATURE

For best results, apply the tape between 8°C and 38°C. Using the tape below freezing may compromise its adhesive qualities. Should you need to use the tape in colder temperatures, contact us for potential adjustments to the adhesive.



APPLICATION TECHNIQUE

Applying firm pressure during application enhances adhesive contact and bond strength. Ensure that bonding surfaces are clean, dry, and well-prepared. Seal the tape securely when not in use to protect it from sunlight exposure.



EXPIRY GUIDELINES

Under ideal conditions (23°C and 60% humidity), the tape is effective for 12 months post-production.